


Cat.5e FTP Keystone Jack

Shielded or Half Shielded, Dual Type. White Color



Description

Part Number:
D1-5EUVD/F
D1-5EUHD/F

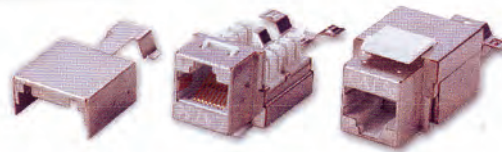

CC: Color BL: Blue YL: Yellow GN: Green BK: Black WH: White RD: Red GY: Gray

Features:

- Easy to terminate and compact jack design.
- Exceeds requirements in NEXT TIA/EIA 568-B.2 test procedures.
- Work in standard Keystone opening.
- Small high-density configuration. So you can mount more jacks in plates.
- Beryllium copper contacts of 50mil gold plating for superior connectivity.
- IDC contact design eliminates need to strip individual conductors.
- Insulation displacement contacts (IDC) ensure highest quality and highest reliability termination available.
- Can be re-terminated a minimum number of 250 times.
- Dual type IDC: 110 and Krone type.
- Standard Color Coded: T568A and T568B wiring.
- High-Density solution-Side-Stackable for maximum density.

Physical Specifications:

- Apply UL-94V high-impact, fire-retardant ABS material.
- Beryllium copper contact: 50- μ gold-plated pins over 100- μ nickel layer.
- Insertion life cycle: 1,000 cycles (minimum) / I.D.C. 250 cycles (minimum).
- Plug & jack contact force: 100 g.
- Take IDC (insulation Displacement Connector) 22~26 AWG wires.
- Plug retention force: 30 lb. (minimum).
- Feature staggered plug contacts.
- include dust covers for dust and dampness protection.
- FCC Part 68. UL certified.

Application:

Category 5e FTP Keystone Jacks-90Deg.

D'ONE Infra Category 5e Keystone Jacks use high quality PC material of UL approval.

They guarantee a defective-free environment and meet/exceed ANSI/EIA/TIA 568-B.2 and ISO/IEC 11801 connector requirements for high performance and reliable transmission service.

Applications:

- 1.000 Mbps Gigabit Ethernet (IEEE 802.3Z)
- 622 Mbps ATM
- 155 Mbps ATM
- 100 Mbps TP-PMD
- 100 Mbps Fast Ethernet (IEEE 802.3u)
- 100 Mbps CDDI
- 10 Mbps Ethernet (IEEE 802.3)
- 4 Mbps & 16 Mbps
- Token-Ring (IEEE 802.5)
- ISDN
- Analog voice

Electrical Specifications:

- Insulation Resistance : 500M.W
- Contact Resistance : 20M.W
- Current rating : 1.5 Amps
- DC Resistance : Max.0.1 W
- Dielectric Withstand Voltage: 1.000VAC RMS@60Hz/1 min

Record of Recognition

